PM

WIRING DUCT

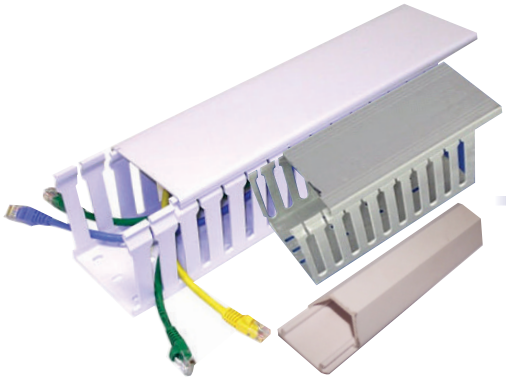

PRODUCTS DESCRIPTIONS

CHARACTERISTICS

Wiring Duct PM mostly use in electrical panels or buildings as cable protector also as a place to make it neat. Available in different size and types for all needs. Can be use for electrical panels (type Solid and Slotted) also it can be use for house and building installations either for decoration wiring duct or telephone wiring duct. Wiring Duct PM made of non flammable PVC material, good insulation and heat resisting up to 85˚C.

Wiring Duct PM already tested for institution of STP (Sentra Teknologi Polimer Indonesia) such fire resistance test (UL-94). There are 2 spesification for burn resistance test V.0 which mean the fire can inguished for 10 seconds while test.

ADVANTAGE OF PRODUCTS

- Fire retardant, according to V.0 standard
- Made from PVC with quality of adequate thickness
- Customizable length as customers wish

PREMIUM WIRING DUCT (Slotted)



- Material: made from PVC (Grey)
- Struction: made up of duct and lid
- Equipped with holes on both side
- Heat Resisting up to 85˚C
- Burn Resistance V.0

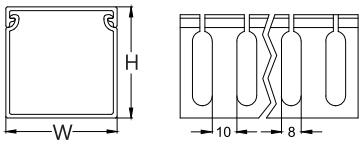

TYPE	WxH(mm)	Contained Wire (16-14 AWG)	Lenght
PM - 0	25 x 25	10 - 25 PCS	2M
PM - 1	25 x 45	20 - 25 PCS	2M
PM - 1.2	32 x 32	25 - 45 PCS	2M
PM - 1.5	32 x 45	40 - 55 PCS	2M
PM - 2	45 x 45	60 - 70 PCS	2M
PM - 3	33 x 65	60 - 75 PCS	2M
PM - 5	45 x 65	110 -120 PCS	2M
PM - 5.7	65 x 65	180 - 200 PCS	2M
PM - 7	70 x 100	250 - 300 PCS	2M
PM - 7.5	100 x 70	250 - 300 PCS	2M
PM - 8	100 x 100	300 - 400 PCS	2M

WIRING DUCT (Slotted)



- Material: made from PVC (Grey)
- Struction: made up of duct and lid
- Equipped with holes on both side
- Heat Resisting up to 85˚C
- Burn Resistance V.0

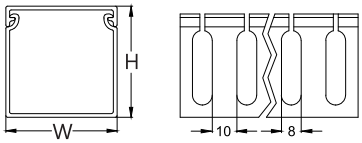

TYPE	WxH(mm)	Contained Wire (16-14 AWG)	Lenght
WD - 0	25 x 25	10 - 25 PCS	1.7M
WD - 1	25 x 45	20 - 25 PCS	1.7M
WD - 1.2	32 x 32	25 - 45 PCS	1.7M
WD - 1.5	32 x 45	40 - 55 PCS	1.7M
WD - 2	45 x 45	60 - 70 PCS	1.7M
WD - 3	33 x 65	60 - 75 PCS	1.7M
WD - 5	45 x 65	110 -120 PCS	1.7M
WD - 5.7	65 x 65	180 - 200 PCS	1.7M
WD - 7	70 x 100	250 - 300 PCS	1.7M
WD - 7.5	100 x 70	250 - 300 PCS	1.7M
PM - 8	100 x 100	300 - 400 PCS	1.7M

WIRING DUCT (Solid)



- Material: made from PVC (Grey & White)
- Struction: made up of duct and lid
- Heat Resisting up to 85℃
- Burn Resistance V.0



TYPE	WxH(mm)	Contained Wire (16-14 AWG)	Lenght
SD - 0	25 x 25	10 - 25 PCS	1.7M
SD - 1	25 x 45	20 - 25 PCS	1.7M
SD - 1.2	32 x 32	25 - 45 PCS	1.7M
SD - 1.5	32 x 45	40 - 55 PCS	1.7M
SD - 2	45 x 45	60 - 70 PCS	1.7M
SD - 3	33 x 65	60 - 75 PCS	1.7M
SD - 5	45 x 65	110 -120 PCS	1.7M
SD - 5.7	65 x 65	180 - 200 PCS	1.7M
SD - 7	70 x 100	250 - 300 PCS	1.7M
SD - 7.5	100 x 70	250 - 300 PCS	1.7M
SD - 8	100 x 100	300 - 400 PCS	1.7M

DECORATION WIRING DUCT (Solid)

- Material: made from PVC (White)
- Struction: made up of duct and lid
- Heat Resisting up to 85℃
- Burn Resistance V.0



TYPE	WxH(mm)	Contained Wire (16-14 AWG)	Lenght
TF - 1	16 x 16	3 - 10 PCS	2M
TF - 2	19 x 16	4 - 11 PCS	2M
TF - 3	24.5 x 16	5 - 12 PCS	2M
TF - 4	31.8 x 16	7 - 15 PCS	2M

TELEPHONE WIRING DUCT (Self-adhesive)



- Material: made from PVC (White & Grey)
- Struction: made up of duct and lid
- Heat Resisting up to 85℃
- Burn Resistance V.0
- With Spacious designed, and the strong adhesive tape in duct button



TYPE	A(mm)	B(mm)	C(mm)	Lenght
Telephone Wiring Duct, White				
TB - 1	8	12	6.8	1M
TB - 2	8,5	17	8	1M
TB - 3	10	20	10	1M
TB - 4	12	22	12	1M
TB - 5	12.5	24	13	1M
TB - 6	11.5	26	14.5	1M
Telephone Wiring Duct, Grey				
TB - 1A	8	12	6.8	1M
TB - 2A	8,5	17	8	1M
TB - 3A	10	20	10	1M
TB - 4A	12	22	12	1M
TB - 5A	12.5	24	13	1M
TB - 6A	11.5	26	14.5	1M

PT Puma Elektrik Niaga

Head Office
Jl. Industri Keroncong No.95
Jati Uwung - Tangerang
Tel.+62 21 5930 8891
Fax. +62 21 590 1458

Marketing Office
Jl. Pangeran Jayakarta No. 141M
Central Jakarta 10730
Jakarta - Indonesia
Tel.: +62 21 2268 599
Fax: +62 21 2268 3803
E-mail: pen@pumaelektrik.com
www.pumaelektrik.com